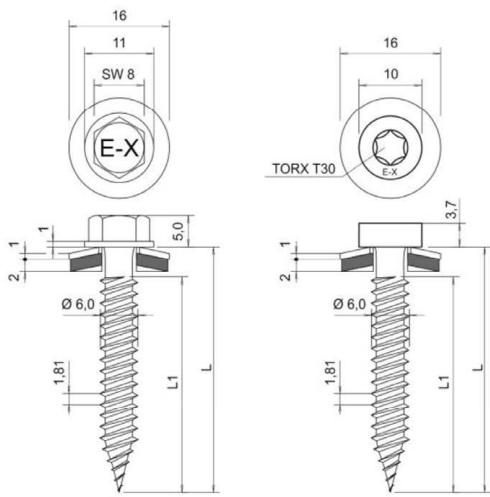


		Material: Fastener: stainless Steel (1.4301) - EN 10088 Washer: stainless Steel (1.4301) - EN 10088 with EPDM- seal Component I: S280GD, S320GD- EN 10346 Component II: S235 – EN 10025-1 S280GD, S320GD - EN 10346	
		Drilling capacity: $\Sigma t_i \leq 2.50 \text{ mm}$	
		Timber substructures: no performance determined	

	$t_i \text{ [mm]}$	$t_{ii} \text{ [mm]}$									
		0.40	0.50	0.63	0.75	0.88	1.00	1.13	1.25	1.50	
$V_{R,k} \text{ [kN]}$	0.40	0.95	-	0.95	-	0.95	-	0.95	-	0.95	-
	0.50	0.95	-	1.53	-	1.53	-	1.53	-	1.53	-
	0.55	0.95	-	1.53	-	1.75	-	1.75	-	1.75	-
	0.63	0.95	-	1.53	-	2.10	-	2.10	-	2.10	-
	0.75	0.95	-	1.53	-	2.10	-	2.62	-	2.62	-
	0.88	0.95	-	1.53	-	2.10	-	2.62	-	3.21	-
	1.00	0.95	-	1.53	-	2.10	-	2.62	-	3.21	-
	1.13	0.95	-	1.53	-	2.10	-	2.62	-	3.21	-
	1.25	0.95	-	1.53	-	2.10	-	2.62	-	3.21	-
	1.50	0.95	-	1.53	-	2.10	-	2.62	-	3.21	-
$N_{R,k} \text{ [kN]}$	0.40	0.46	-	0.74	-	0.74	-	0.74	-	0.74	-
	0.50	0.46	-	0.76	-	1.12	-	1.22	-	1.22	-
	0.55	0.46	-	0.76	-	1.12	-	1.46	-	1.59	-
	0.63	0.46	-	0.76	-	1.12	-	1.46	-	1.81	-
	0.75	0.46	-	0.76	-	1.12	-	1.46	-	1.81	-
	0.88	0.46	-	0.76	-	1.12	-	1.46	-	1.81	-
	1.00	0.46	-	0.76	-	1.12	-	1.46	-	1.81	-
	1.13	0.46	-	0.76	-	1.12	-	1.46	-	1.81	-
	1.25	0.46	-	0.76	-	1.12	-	1.46	-	1.81	-
	1.50	0.46	-	0.76	-	1.12	-	1.46	-	1.81	-

No further specifications.

Self-drilling screw with hexagon head and sealing washer $\geq \varnothing 16 \text{ mm}$ Self-drilling screw with torx drive and sealing washer $\geq \varnothing 16 \text{ mm}$	Annex 16
E-X RS 6.0 x L	